

Poseidon model 3265

Network Monitoring of temperature & humidity, alarm over GSM and SMS

The Poseidon model 3265 alerts the user to critical events (temperature or humidity outside set limits) via email, SMS directly to your phone, or contacts your NMS (Network Management Software) over SNMP.


The user can configure and display current values over the web interface.



- Accomodates temperature and humidity sensors.
- Connect up to 5 sensors (using external Poseidon T-Box, takes 1 without).
- Use (up to 10m) standard telephone cables, accessories and RJ11 or RJ12 connectors.
- In an alarm state (temperature and humidity outside set parameters), SMS alert is sent over GSM network, or email – if available.


Applications

- Temperature monitoring of server environment, independent monitoring over GSM network – alarm via SMS.
- Monitoring of operating conditions (temp,humidity, ICT (server, security and phone systems)
- Monitoring of server room, air-conditioned 19" racks, distribution boxes and servers.
- Monitoring of back up power supply, UPS
- Monitoring and logging of operating conditions of stores, cold storages, freezers and fridges (food industry, pharmacy)
- Large buildings – heating optimisationand long-term monitoring of environmental conditions
- Air-conditioning monitoring, monitoring of condensed water leakage from air-conditioning units

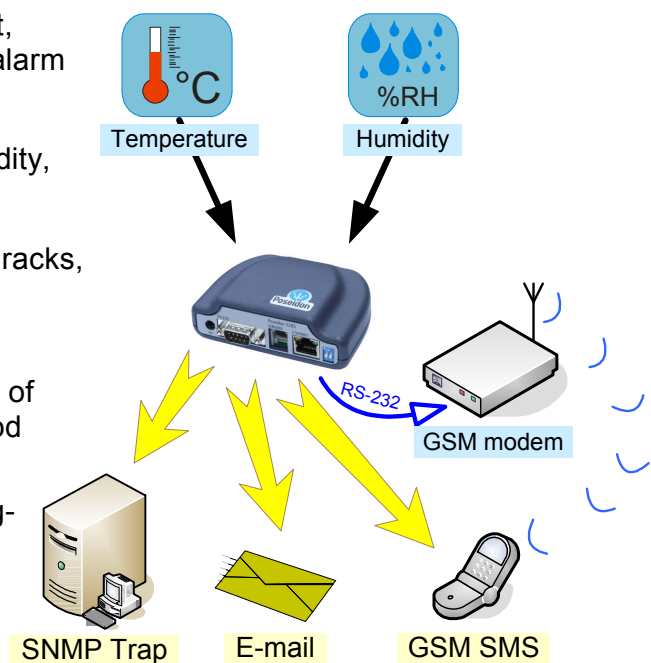

Basic features

- **No specialised software required.**
- Can be connected to every monitoring system: in industries, IT, buildings and networks.
- Graphic web-based configuration interface
- One Poseidon 3265 unit monitors up to **5 external sensors.**
- **Alarm alert - Email, SNMP Trap, SMS** (over external GSM modem).
- **Security** ensured by password, IP address range, HW protection
- Each sensor has unique ID

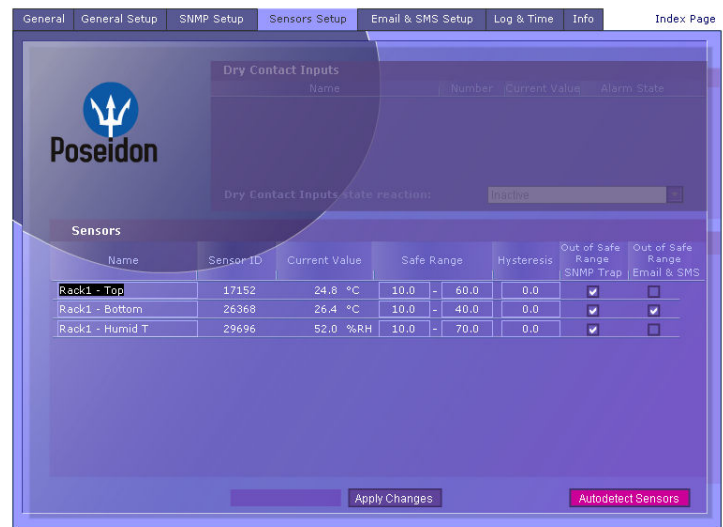

- Open communication protocols (**SNMP, XML, Modbus/TCP** and others)
- GSM modem support for **warning via SMS** (modem connected via RS-232).
- Support and plug-in modules for many NMS applications: PRTG, MonitorOne, LortotPro, HP OpenView, Nagios, IBM Tivoli, SNMPc, MRTG, and others.
- Temperature and humidity sensors in various versions and cables lengths (1, 3, 10m).
- Package of programs and utilities (PN Eye, **Pos-Excel, Alarm Forwarder** and others)
- We supply several programs for food industry, ISO and HACCP measurement (**CapTemp**), IT monitoring (**nmsDashboard**) and others application
- **SDK** (Software Development Kit) development libraries + examples (**VB, Delphi, C, C#**)

Accessories



TG20 GSM modem



Poseidon T-Box



Poseidon T-Box2



Temp-1Wire 1m



Humid-1Wire 3m

600 165	Poseidon 3265	Poseidon model 3265 unit only (without GSM modem and power adaptor)
600 313	Poseidon 3265 GSM2 Tset	Start set - GSM modem, temperature sensor, CD, power supply etc.
600 005	Temp-1Wire 3m	Temperature probe, 3m connecting cable (1m =600 242, 10m =600 056)
600 311	Temp-1Wire-Outdoor 3m	Temperature probe for external use in food industry, cable 3m long
600 279	Humid-1Wire 3m	Humidity probe, extending cable 3m long(1m= 600 278)
600 040	Poseidon T-Box	Termination-Box for connecting up to 5 sensors, 10 cm long cable
600 280	Poseidon T-Box2	Termination-Box for connecting 2 sensors, 3m long cable
600 312	GSM Modemcom G10	GSM modem set, power supply, antenna and connecting cables
600 166	Poseidon 3262	Poseidon model 3262 unit

OPEN XTRA

**Building Society Chambers
Wesley Street
Otley
West Yorkshire
LS21 1AZ**

Tel: +44 (0)1943 465918

Email: sales@openxtra.co.uk

Fax: +44 (0)1943 466003

Web: www.openxtra.co.uk