


Room Alert® 32S

“Advanced Physical Environment Monitoring,
Alerting & Automatic Corrective Action.”

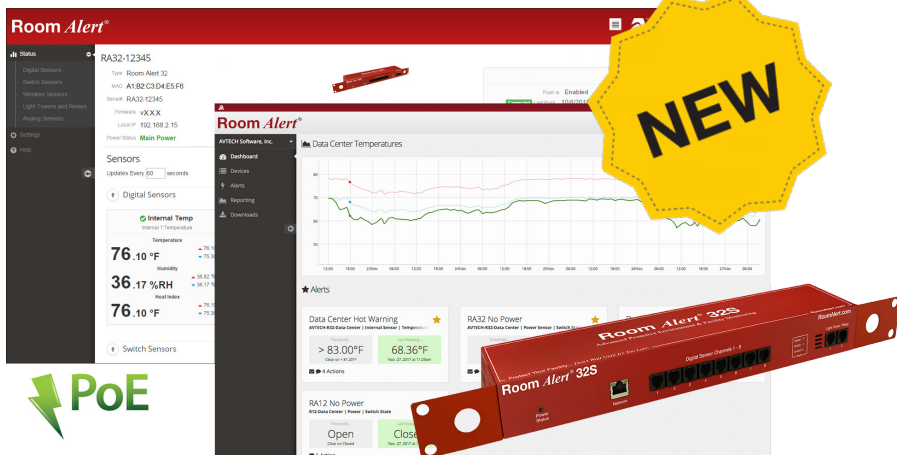

Order Now For...

CALL

Room Alert 32S RA32S-DAP-RAS



Our Most Advanced, Most Secure & Highest Capacity Room Alert

- Secure data transfer options include HTTPS / SSL Web Interface, SSL / TLS Email Support, Multiple SNMP Versions, 2048-bit encryption and SSL Push to Room Alert Account.
- Easy Ethernet ‘Plug & Play’ setup for immediate IT & facilities environment monitoring.
- Includes built-in sensors for digital temperature, humidity, heat index, dew point and power with “PUSH” technology.
- Includes Power over Ethernet (PoE), a built-in Mini Uninterruptible Power Supply (MUPS), external Digital Active Power w/ Temperature Sensor, external Digital Temperature Sensor and one free year of Professional Room Alert Account service.
- Includes ports for 8 digital sensors and 16 switch sensors, as well as additional ports to connect 2 0-5V analog sensors, 2 low voltage relays, and 2 Light Tower & Relay Adapters (LTA).
- Offers secure and advanced alerting by email, email-to-SMS, SNMP, JSON, HTTP Post, webpage update and more.
- Use Room Alert 32S’s built-in web server, RoomAlert.com Account (included), local Room Alert management software (included) or SNMP to monitor across your network.
- The Room Alert 32S package allows real-time sensor status, data logging, graphing, advanced alerting, Fahrenheit/Celsius, high/low watermarks and much more.



Manufacturer: AVTECH Software, Inc.

AVT-200124.08

INCLUDES: Room Alert 32S Rack Unit (1U 19”), built-in Digital Temperature Sensor, built-in Digital Humidity Sensor, built-in Heat Index Sensor, built-in Dew Point Sensor, built-in Main Power Sensor, external Digital Active Power w/ Temperature Sensor (10), external Digital Temperature Sensor (25), 8 external Digital Sensor Ports (RJ-11), 16 Switch Sensor Channels, Power On/Off Button, Factory Reset Button, Power over Ethernet (PoE), LED Sensor Status indicators, built-in Mini Uninterruptible Power Supply (MUPS), rotating mounting wings, PUSH technology, Ethernet Connection (RJ-45), 2 External Light Tower or Relay Adapter (LTA) Ports, 2 Relay Output Ports (0.3A@125VAC / 1A@24VDC), 2 0-5V Analog Sensor Input Ports, 10’ (3.1m) Ethernet cable, 5V Power Adapter (110/240V, RoHS), built-in web server, SNMP Trap & Query enabled, SNMP MIB, bundled local Room Alert management software, downloadable *Room Alert User’s Guide & Reference Manual*, 1 year RoomAlert.com Professional Account upgrade, lifetime support, lifetime firmware updates, ‘30-Day Satisfaction Guarantee’. Optional sensors, Light Tower Adapters (LTAs), GSM modem & RoomAlert.com upgrade options available.